

**FEATURES :**

- \* Time Lag Type (Slow Blow)
- \* RoHS-Compliant Products


**APPROVALS :**

- \* UL Recognized
- \* CSA Acceptance
- \* METI (PSE) [1A-5A]



## 20T SERIES

**DIMENSIONS :**

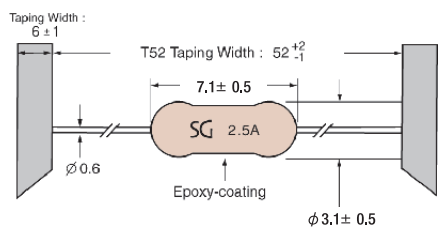


Unit : mm

**ELECTRICAL CHARACTERISTICS :**

% of Ampere Rating	Opening Time
100%	4 hours Min.
200%	1 sec Min. / 60 sec Max.
300%	* 0.2 sec Min. / 3 sec Max.
800%	** 0.02 sec Min. / 0.1 sec Max.

\* 0.15 sec Min. : 100mA - 350mA  
 \*\* 0.015 sec Min. : 100mA - 350mA

**AVERAGE TIME CURRENT CURVES :**

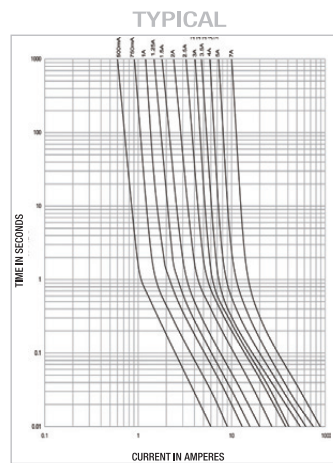

**SPECIFICATIONS :**

Product Code	Ampere Rating	Voltage Rating AC	Resistance Value	Typical Melting Ft (A <sup>2</sup> sec)
20T 0100 *	100 mA	125 V	3.45	0.055
20T 0125 *	125 mA	125 V	3.40	0.056
20T 0200	200 mA	125 V	2.12	0.081
20T 0315	315 mA	125 V	1.80	0.103
20T 0375	375 mA	125 V	1.41	0.158
20T 0500	500 mA	125 V	1.155	0.250
20T 0750	750 mA	125 V	0.806	0.611
20T 1000	1 A	125 V	0.605	0.912
20T 1500	1.5 A	125 V	0.448	1.486
20T 2000	2 A	125 V	0.352	2.418
20T 2500	2.5 A	125 V	0.253	3.554
20T 3000	3 A	125 V	0.195	4.728
20T 3150	3.15 A	125 V	0.166	5.19
20T 3500	3.5 A	125 V	0.132	9.12
20T 4000	4 A	125 V	0.088	15.6
20T 5000	5 A	125 V	0.044	25.2
20T 7000	7 A	125 V	0.041	28.1

\* 100mA / 125mA

**NOTE:**

1. Operating Current - An operating current of 75% or less of rated current is recommended, with further derating required at elevated ambient temperature.
2. Consult PICO sales for the details.