


## Zener Diode in SOD-323

### Features

- Low Zener Impedance
- 500mW Power Dissipation
- High Stability and High Reliability

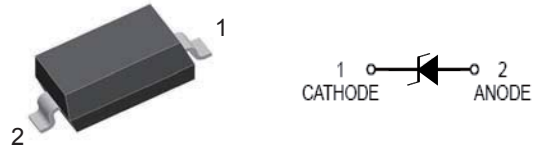

### Mechanical Data

- **Case:** SOD-323 (plastic package).  
Lead free; RoHS compliant
- **Molding Compound Flammability Rating:**  
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:  
260 °C/10 sec. at terminals

### Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified

Characteristic	Symbol	Value	Unit
Forward Voltage (Note 2) @ $I_F = 10\text{mA}$	$V_F$	0.9	V
Power Dissipation(Note 1)	$P_d$	350	mW
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	340	°C/W
Junction Temperature	$T_j$	125	°C
Storage Temperature Range	$T_{stg}$	-55~+125	°C

- 1) Device mounted on ceramic PCB: 7.6mm x 9.4mm x 0.87mm with pad areas 25mm<sup>2</sup>
- 2) Short duration test pulse used to minimize self-heating effect
- 3) f=1KHz





## Electrical Characteristics

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise specified)


Type	Zener Voltage Range <sup>1)</sup>			Dynamic Impedance				Reverse Leakage Current	
	$V_{znom}$	$V_{ZT}$	at $I_{ZT}$	$Z_{ZT}$	at $I_{ZT}$	$Z_{ZK}$	at $I_{ZK}$	$I_R$	at $V_R$
	V	V	mA	Max. ( $\Omega$ )	mA	Max. ( $\Omega$ )	mA	Max. ( $\mu\text{A}$ )	V
BZT52B2V4S	2.4	2.35...2.45	5	100	5	600	1	50	1
BZT52B2V7S	2.7	2.65...2.75	5	100	5	600	1	20	1
BZT52B3V0S	3.0	2.94...3.06	5	95	5	600	1	10	1
BZT52B3V3S	3.3	3.23...3.37	5	95	5	600	1	5	1
BZT52B3V6S	3.6	3.53...3.67	5	90	5	600	1	5	1
BZT52B3V9S	3.9	3.82...3.98	5	90	5	600	1	3	1
BZT52B4V3S	4.3	4.21...4.39	5	90	5	600	1	3	1
BZT52B4V7S	4.7	4.61...4.79	5	80	5	500	1	3	2
BZT52B5V1S	5.1	5.00...5.20	5	60	5	480	1	2	2
BZT52B5V6S	5.6	5.49...5.71	5	40	5	400	1	1	2
BZT52B6V2S	6.2	6.08...6.32	5	10	5	150	1	3	4
BZT52B6V8S	6.8	6.66...6.94	5	15	5	80	1	2	4
BZT52B7V5S	7.5	7.35...7.65	5	15	5	80	1	1	5
BZT52B8V2S	8.2	8.04...8.36	5	15	5	80	1	0.7	5
BZT52B9V1S	9.1	8.92...9.28	5	15	5	100	1	0.5	6
BZT52B10S	10	9.8...10.2	5	20	5	150	1	0.2	7
BZT52B11S	11	10.8...11.2	5	20	5	150	1	0.1	8
BZT52B12S	12	11.8...12.4	5	25	5	150	1	0.1	8
BZT52B13S	13	12.7...13.3	5	30	5	170	1	0.1	8
BZT52B15S	15	14.7...15.3	5	30	5	200	1	0.1	10.5
BZT52B16S	16	15.7...16.3	5	40	5	200	1	0.1	11.2
BZT52B18S	18	17.6...18.4	5	45	5	225	1	0.1	12.6
BZT52B20S	20	19.6...20.4	5	55	5	225	1	0.1	14
BZT52B22S	22	21.6...22.4	5	55	5	250	1	0.1	15.4
BZT52B24S	24	23.5...24.5	5	70	5	250	1	0.1	16.8
BZT52B27S	27	26.5...27.5	2	80	2	300	0.5	0.1	18.9
BZT52B30S	30	29.4...30.6	2	80	2	300	0.5	0.1	21
BZT52B33S	33	32.3...33.7	2	80	2	325	0.5	0.1	23.1
BZT52B36S	36	35.3...36.7	2	90	2	350	0.5	0.1	25.2
BZT52B39S	39	38.2...39.8	2	130	2	350	0.5	0.1	27.3
BZT52B43S	43	42.1...43.9	2.5	130	2	500	1	2	33
BZT52B47S	47	46.1...47.9	2.5	150	2	500	1	2	36
BZT52B51S	51	40.0...52.0	2.5	180	2	500	1	1	39
BZT52B56S	56	54.9...57.1	2.5	180	2	500	1	1	43
BZT52B62S	62	60.8...63.2	2.5	200	2	500	1	0.2	47
BZT52B68S	68	66.6...69.4	2.5	250	2	500	1	0.2	52
BZT52B75S	75	73.5...76.5	2.5	300	2	500	1	0.2	57

<sup>1)</sup>  $V_{ZT}$  is tested with pulses (20 ms).

**Typical Characteristics** ( $T_{amb} = 25\text{ }^{\circ}\text{C}$  unless otherwise specified)

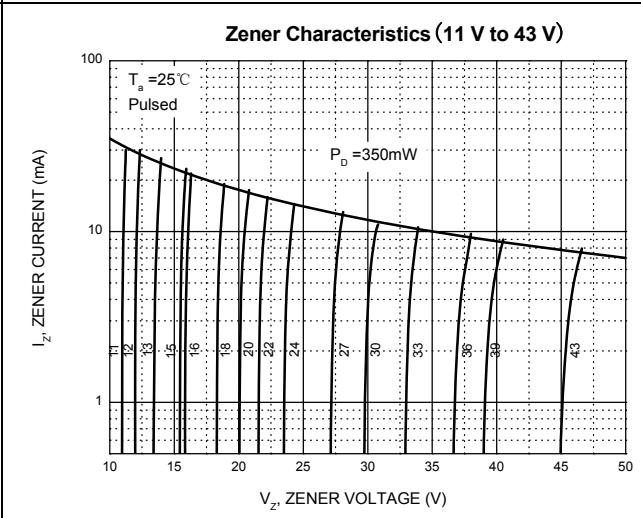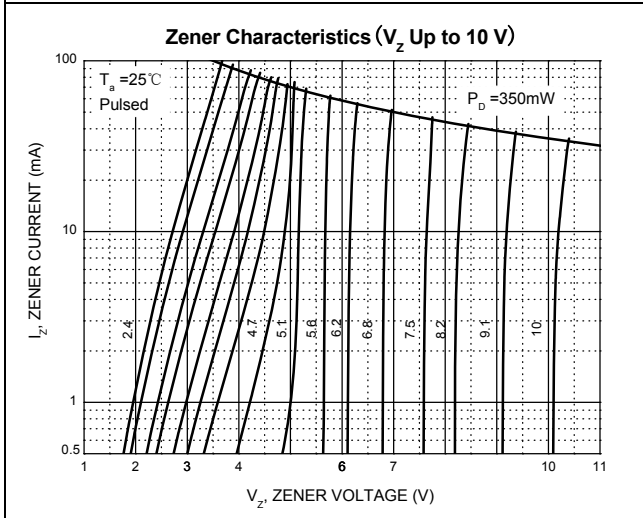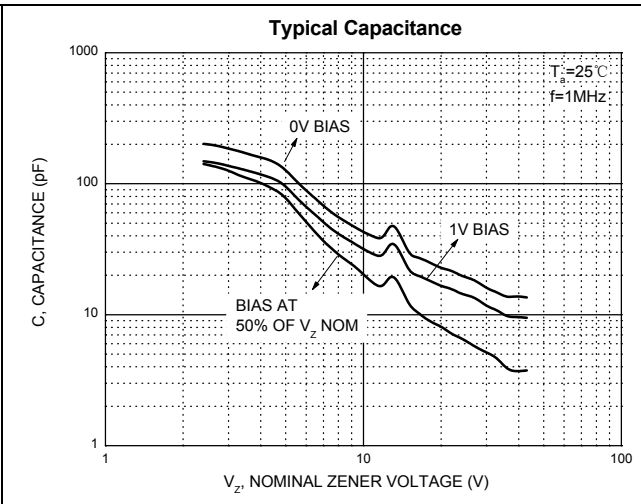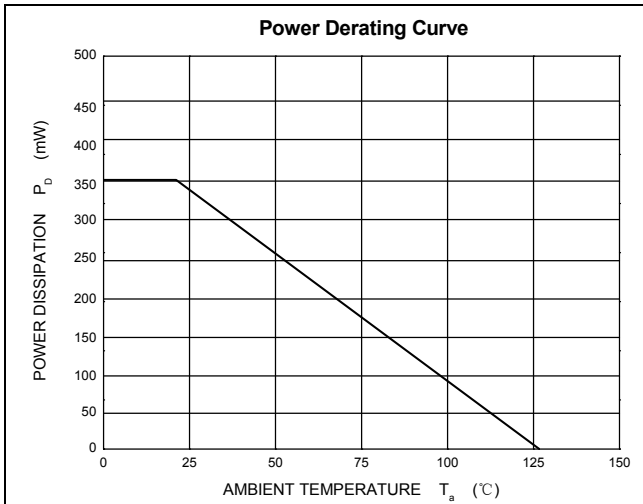

## Package Dimensions

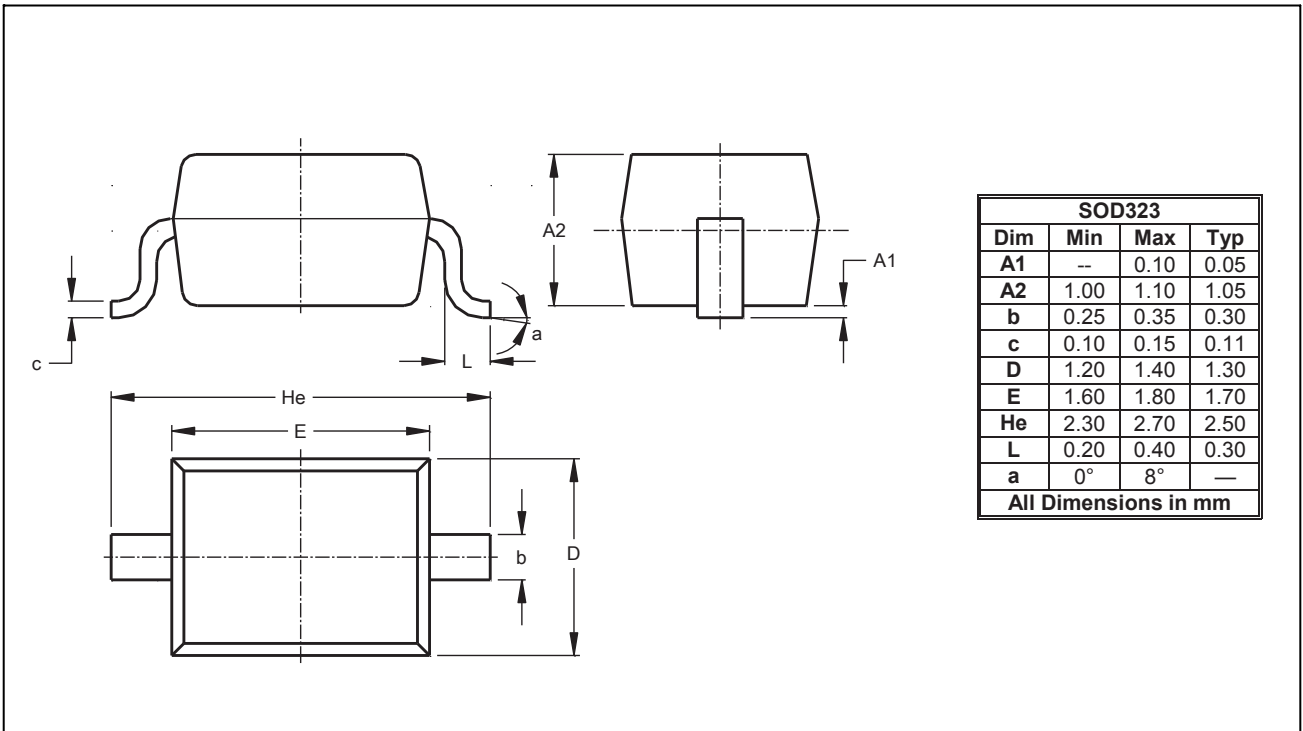

## Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
BZT52BxxS	SOD-323	Tape and reel	3000pcs / reel	EIA STD RS-481

## Revision history

Date	Revision	Changes
23-May-2012	1.0	Initial release

## CAUTION / WARNING

Information in this document is believed to be accurate and reliable. However, CREATEK does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Users should independently evaluate the suitability of and test each product selected for their own applications, and CREATEK assumes no liability whatsoever relating to the choice, selection or use of the CREATEK products and services described herein.

CREATEK reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product.

Information in this document supersedes and replaces all information previously supplied.

Products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an CREATEK product can reasonably be expected to result in personal injury, death or severe property or environmental damage. CREATEK accepts no liability for inclusion and/or use of CREATEK products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.


Resale of CREATEK products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by CREATEK for the CREATEK product or service described herein and shall not create or extend in any manner whatsoever, any liability of CREATEK.

CREATEK expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. CREATEK only obligations are those in the CREATEK Standard Terms and Conditions of Sale and in no case will CREATEK be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.

---

Specifications are subject to change without notice

© Copyright 2009, CREATEK Microelectronics

 CREATEK® is a registered trademark of CREATEK Microelectronics

All rights reserved