

HSF


NOTES:
 Current Rating: 0.5AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

Ordering Information

5340- XX P XX B 0 X

No. of Pins	Contact Plating	Color Insulator	Series No.
10 30	S0=Gold Flash/Tin	B=Black	1=3.10mm
14 34	S3=10u"Gold/Tin	G=Grey(427C)	2=1.90mm
16 40	S4=15u"Gold/Tin	E=Grey(413C)	
18 44	S5=30u"Gold/Tin		
20 50			
24 60			
26 80			

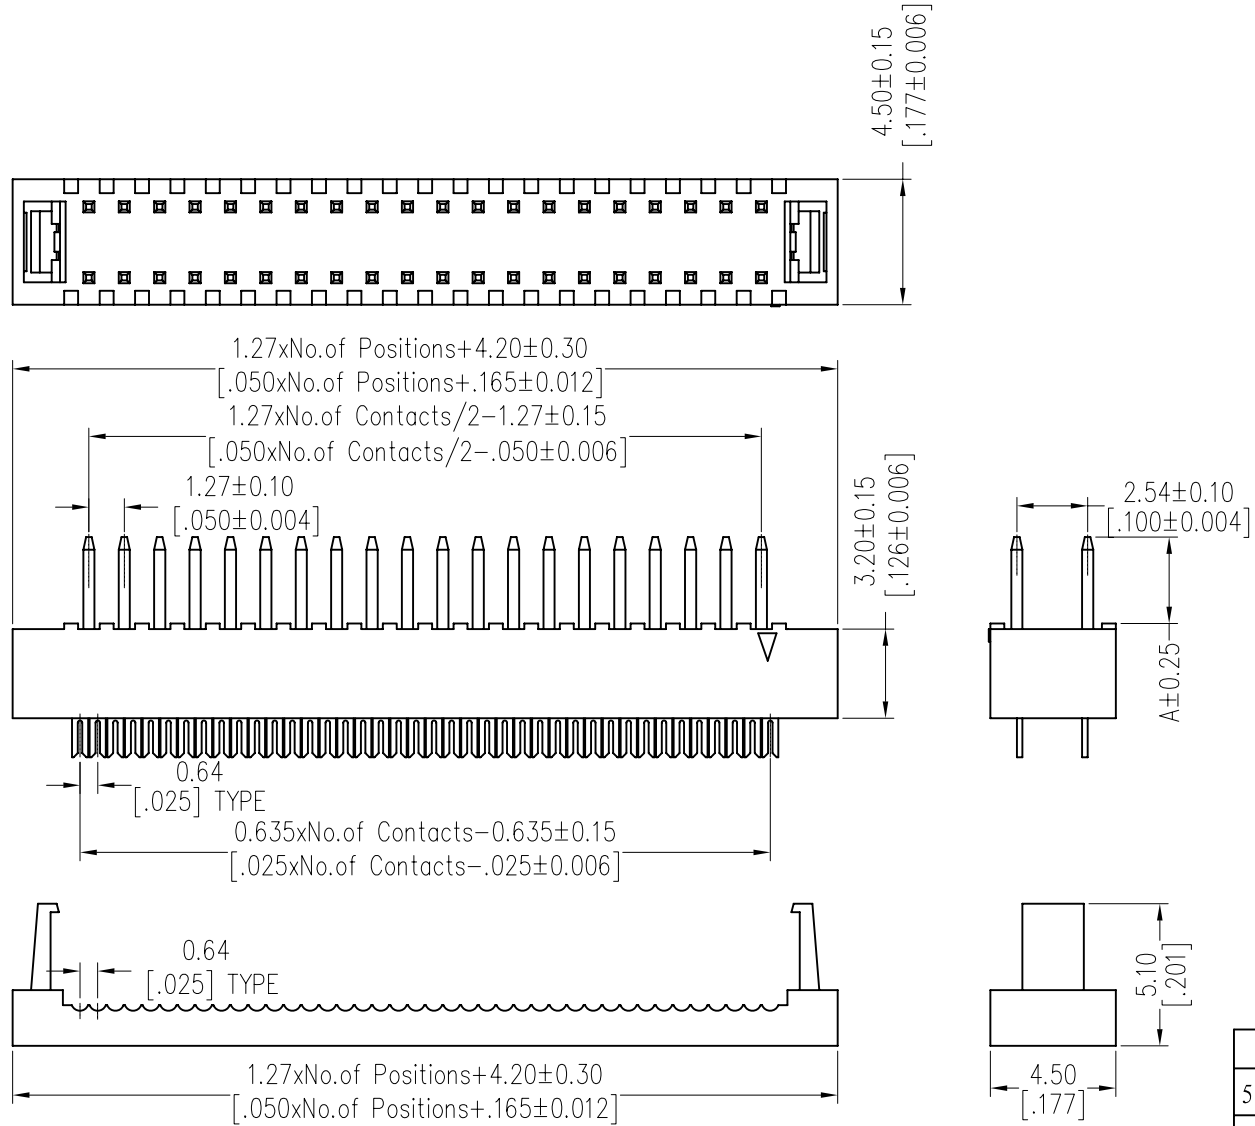

PART NO.	DIM "A"
5340-XXPXXB01	3.10
5340-XXPXXB02	1.90

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				x.x ±0.40	JYHuang	2012/10/09	UNIT	mm	SEE TAB
				x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/10/09	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	1.27x2.54 DIP PLUG CONNECTOR (TERMINATED HEIGHT 5.1)
				Angle ± 3°			PROJ.	Customer NO.	
				DIM TOL					